

22/40/2024-/-/-/-
G288yaraProposed C271yara

SCHEDULE 40 TO CLAUSE 43.02 DESIGN AND DEVELOPMENT OVERLAY

Shown on the planning scheme map as **DDO40**.

FITZROY WEST

1.0

Design Objectives

22/40/2024-/-/-/-
G288yaraProposed C271yara

To ensure development responds to the mixed typology and heritage character in the streetscape by supporting:

- a mid-rise character (ranging from 3 to 8 storeys) in the mixed use precinct of Fitzroy West which ensures the varied but low heritage street wall remains the visually dominant element of the streetscape and upper level developments are recessive providing a clear visual distinction between lower street walls and upper level development; ~~and~~.
- a new mid-rise character (ranging from 3 to 7 storeys) behind a new street wall in the Commercial 2 Zone land which reflects the Alexandra Parade corner, Nicholson Street frontages and surrounding heritage influences.

To ensure the façade composition and articulation of development responds to:

- the prominent heritage character of mixed industrial and residential heritage buildings within the streetscape of Fitzroy West; and
- the boulevard character of Alexandra Parade, transitioning down to sensitive interfaces behind the pocket of Commercial 2 Zone land at the western junction of Alexandra Parade.

To encourage development designs that promote pedestrian activity and passive surveillance, contributes to a high quality public realm, and avoid overshadowing of footpaths on opposite side of streets and public spaces.

~~To ensure that development provides for equitable development outcomes through building separation and a design response that considers the development opportunities of neighbouring properties.~~

To ensure development responds to sensitive interfaces by ensuring the overall scale and form of new development provides a suitable transition to low scale residential areas and protects these properties from an unreasonable loss of amenity through visual bulk, overlooking and overshadowing.

2.0

Buildings and works

24/02/2023-/-/-/-
G343yaraProposed C271yara

A permit is required to construct a building or construct or carry out works, except for:

- rear ground floor extensions no higher than 4 metres above natural ground level;
- an alteration to an existing building façade provided:
 - the alteration does not include the installation of an external roller shutter;
 - in a C1Z, at least 80 per cent of the building façade at ground floor level is maintained as an entry or window with clear glazing; ~~and~~.
 - in a MUZ, the alterations include and/or retain existing windows and pedestrian entry points and do not increase blank walls exceeding 40 per cent of the building façade ground floor.
- construction of an awning to an existing building that projects over a road, if it is authorised by the relevant public land manager.

2.1

Definitions

Green infrastructure means any non-living building infrastructure which supports soft landscaping such as built-in planter boxes, mesh frames or other structures to support climbing plants.

Heritage building means any building subject to a Heritage Overlay ~~and~~, graded as either Contributory or Individually Significant, ~~or any building~~ (including properties on the Victorian Heritage Register).

Laneway means a road reserve ~~of a public road~~, public highway or right of way 9 metres or less in width.

Parapet height does not include features such as brackets, pediments, urns, finials or other decorative elements.

Public realm means all streets and spaces open to the public but does not include laneways.

Rear interface is the rear wall of any proposed building or structure whether on the property boundary or set back from the property boundary.

Soft landscaping means live plants and associated organic material needed to support the health and growth of plants.

Street boundary means the boundary between the public street and the private property.

Street wall means the façade of a building at the street boundary, or if the existing heritage building is set back from the street boundary, ~~the front of the existing~~ or the DDO requires a front setback, the front façade of the building.

Street wall height means the height of the street wall measured by the vertical distance between the footpath at the centre of the frontage and the highest point of the building, parapet, balustrade or eaves at the street edge; or in the case of a heritage building, if it is set back from the street from natural ground level at the centre of the building frontage to the highest point of the building, parapet, balustrade or eaves.

Upper level means development above the height of the street wall.

Upper level setback means the ~~setback of the upper level measured from the street wall of the building~~ minimum distance from development above the height of the street wall to the property boundary, including projections such as balconies, building services and architectural features.

2.2

General ~~Requirements~~ requirements

The requirements below apply to an application to construct a building or construct or carry out works.

A permit cannot be granted to vary a requirement expressed with the term 'must'.

2.3

Street ~~Wall Height and Setback Requirements~~ wall height and front setback requirements

~~Street wall heights~~ Development should not exceed the ~~heights specified~~ preferred street wall heights as shown in Map 1, ~~as applicable and as stated below~~, unless all the following requirements are met, to the satisfaction of the Responsible Authority:

- the built form outcome as a result of the proposed variation satisfies the Design Objectives at Clause 1.0 of this schedule.
- the proposed street wall height provides an appropriate transition, scaling down to the interface with a heritage building.
- the proposed street wall height does not visually overwhelm the adjoining heritage building.

~~Infill development should match the parapet~~ The street wall of infill development adjoining a heritage building must not be higher than the frontage street wall height of the ~~adjacent heritage building to the width of the property boundary or 6m, whichever is the lesser~~ adjoining heritage building, for a minimum length of 6 metres along the front boundary, with a mandatory maximum street wall height of 11.2 metres where an adjacent heritage street wall is taller.

~~If~~ Development should have no front or side street setback, unless an immediately adjoining heritage building is set back from the street, ~~then in which case~~ infill development should match the front setback of the ~~adjacent~~ adjoining heritage building from the same street, excluding laneway frontages.

All other development should achieve a continuous street wall with no front setback to a street.

The street wall on corner buildings should continue the main frontage street wall height for a minimum of 8 metres to the side street, with ~~an appropriate~~ transition in height to match the rear interface where required.

Development of non-heritage buildings on street corners should provide a corner splay at minimum of 1 x 1 meter along the site's corner boundaries.

Development should retain the visual prominence of:

- the heritage street wall in the vistas along the street; and
- heritage fabric of the return façades of heritage buildings on corner sites.

2.4

Upper ~~Level Setback Requirements~~ level setback requirements

Upper levels above the ~~primary street frontage~~ street wall

- ~~should be set back by a minimum of 6 metres for all heritage buildings, except for sites fronting Rose Street, Fitzroy Street, Spring Street (where north of Kerr Street) and Henry Street;~~
- ~~should be setback by a minimum of 6m for non-contributory sites fronting Alexandra Parade, Argyle Street, Cecil Street, Kerr Street, Nicholson Street and Westgarth Street and corners at the intersections of Leicester and Fitzroy Streets, Argyle and Spring Streets and Argyle and Fitzroy Streets;~~
- ~~should be setback by a minimum of 3m above the street frontage of Rose Street, Fitzroy Street, Spring Street (where north of Kerr Street) and Henry Street;~~

Upper levels above the primary street frontage should be setback by a minimum of 6 metres for non-contributory sites.

~~For development over 16.4 metres, the top most upper level above a heritage building should be set back a further 3.2 metres from the principal frontage~~

~~Upper levels above a secondary street wall of a heritage building on corner sites should be set back by 6 metres.~~

Upper levels above a secondary street wall should be set back by a minimum of 3 metres, ~~unless specified otherwise~~ for non-contributory sites.

Upper levels should:

- ~~be visually recessive from main frontages and side streets to ensure development does not overwhelm the heritage streetscape and minimise upper level bulk;~~
- ~~be set back from the street wall below to ensure that upper level additions~~ visually recessive from main frontages and side streets to ensure development as seen from the public realm ~~do not detract from the character of the streetscape~~ does not overwhelm the streetscape and minimises upper level bulk when viewed directly or obliquely along the street; ~~and~~
- contain upper level setbacks above the street wall within a maximum of two steps (including the setback above the street wall below as one step) to avoid repetitive steps in the built form.

Heritage buildings

Upper levels above the primary street frontage must be set back by a minimum of 6 metres for all heritage buildings.

~~Projections such as building services and architectural features (other than shading devices, mouldings etc.), balconies and balustrades should not protrude into a setback.~~ Upper levels above a secondary street wall of a heritage building on corner sites should be set back by 6 metres.

For development over 16.4 metres, the top most upper level above a heritage building should be set back a further 3.2 metres from the principal frontage.

~~For heritage buildings, upper~~ Upper level setbacks behind the street wall in excess of the minimum upper level setback should be provided where:

- it would facilitate the retention of a roof form and/or chimneys that are visible from the public realm, or a roof or any feature that the relevant statement of significance identifies as contributing to the significance of the heritage building or streetscape~~;~~;
- it would maintain the perception of the three-dimensional form and depth of the building~~;~~ and...
- a lesser setback would detract from the character of the streetscape when viewed directly or obliquely along the street.

2.5

Overall Building Height Requirements 2.5 Building height requirements

Development on sites shown as hatched on Map 1 ~~should~~ must not exceed ~~11m~~ 11.2 metres (3 storeys). ~~All other development should not exceed the heights shown on Map 1, as applicable.~~

All other development should not exceed the preferred maximum building heights shown on Map 1.

A permit should only be granted to construct a building or construct or carry out works which exceeds the preferred maximum building height shown on Map 1 where, in addition to other requirements of this DDO, all the following requirements are met to the satisfaction of the responsible authority:

- the built form outcome satisfies:
 - the relevant Design Objectives in Clause 1.0.
 - the Overshadowing and solar access requirements in Clause 2.7.
- the proposal will achieve each of the following:
 - greater building separation than the minimum requirements in this schedule.
 - no additional overshadowing impacts on 22 September on secluded private open space to residentially zoned properties or adjacent parkland or reserves, beyond that which would be generated by a proposal that complies with the preferred building height.


Architectural features (except service equipment or structures) may exceed the mandatory or preferred maximum building height.

Service equipment and/or structures including balustrades, unenclosed pergolas for communal areas, shading devices, plant rooms, ~~lift overruns~~ lifts, stair wells, structures associated with pedestrian access, green roof areas and other such equipment may exceed the mandatory or preferred maximum height provided that:


- the equipment/structures do not cause additional overshadowing of secluded private open space to residential land, opposite footpaths, kerb outstands ~~etc.~~ and or planting areas in the public realm.

- the equipment/structures are no higher than 2.6 metres above the proposed building height; ~~and~~...
- the equipment/structures occupy less than 50 per cent of the roof area (solar panels ~~and green roof~~ excepted).

Map 1: ~~Street Wall Heights and Building~~ Building and street wall heights

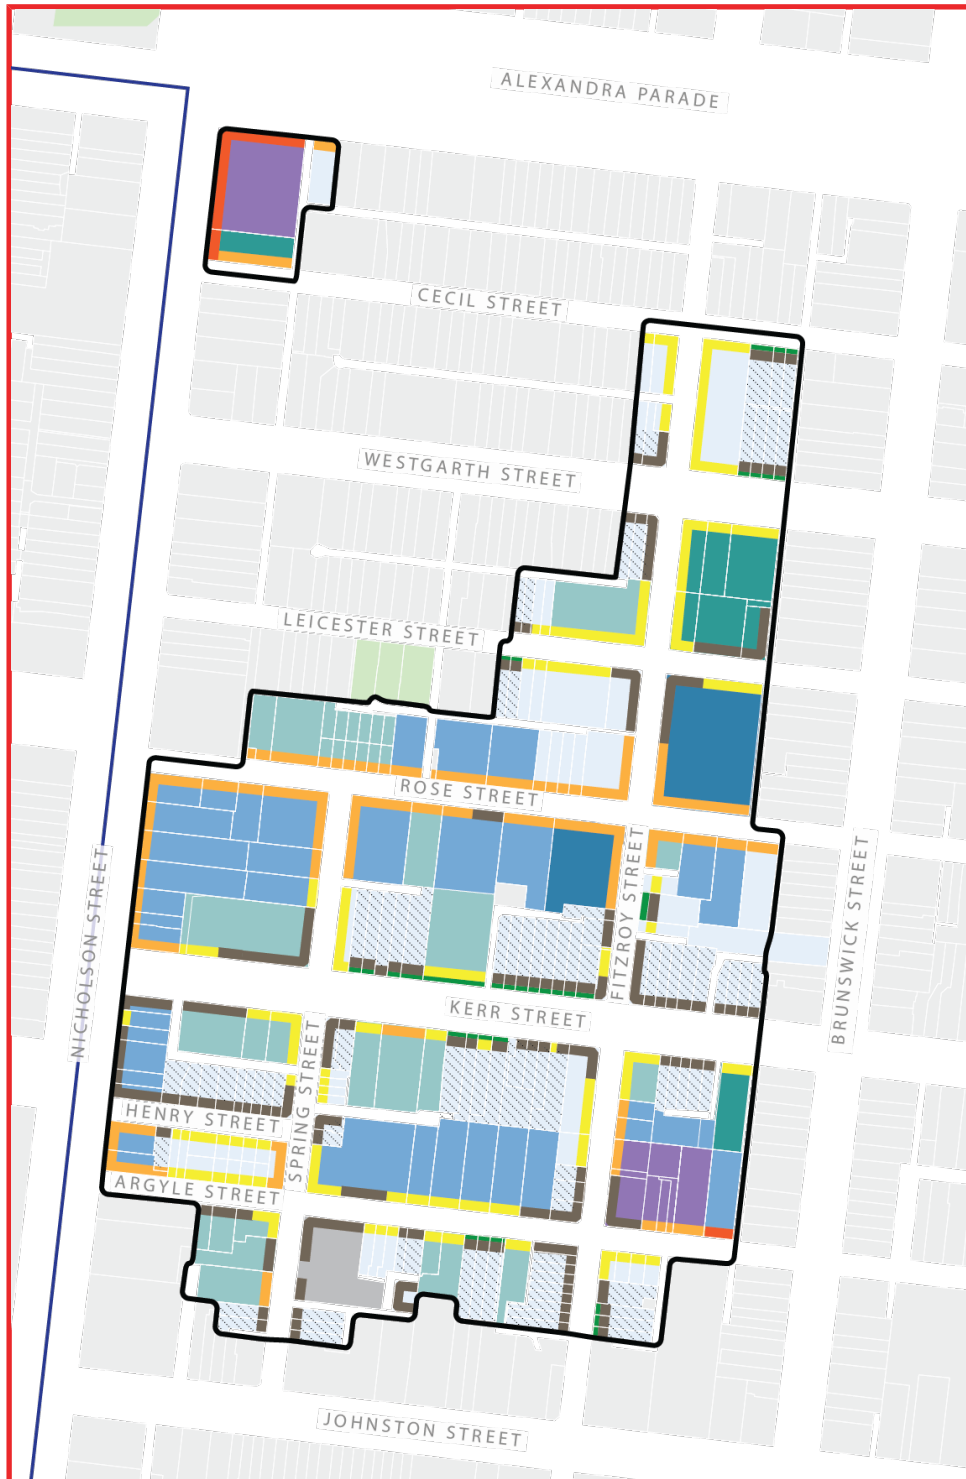

YARRA PLANNING SCHEME

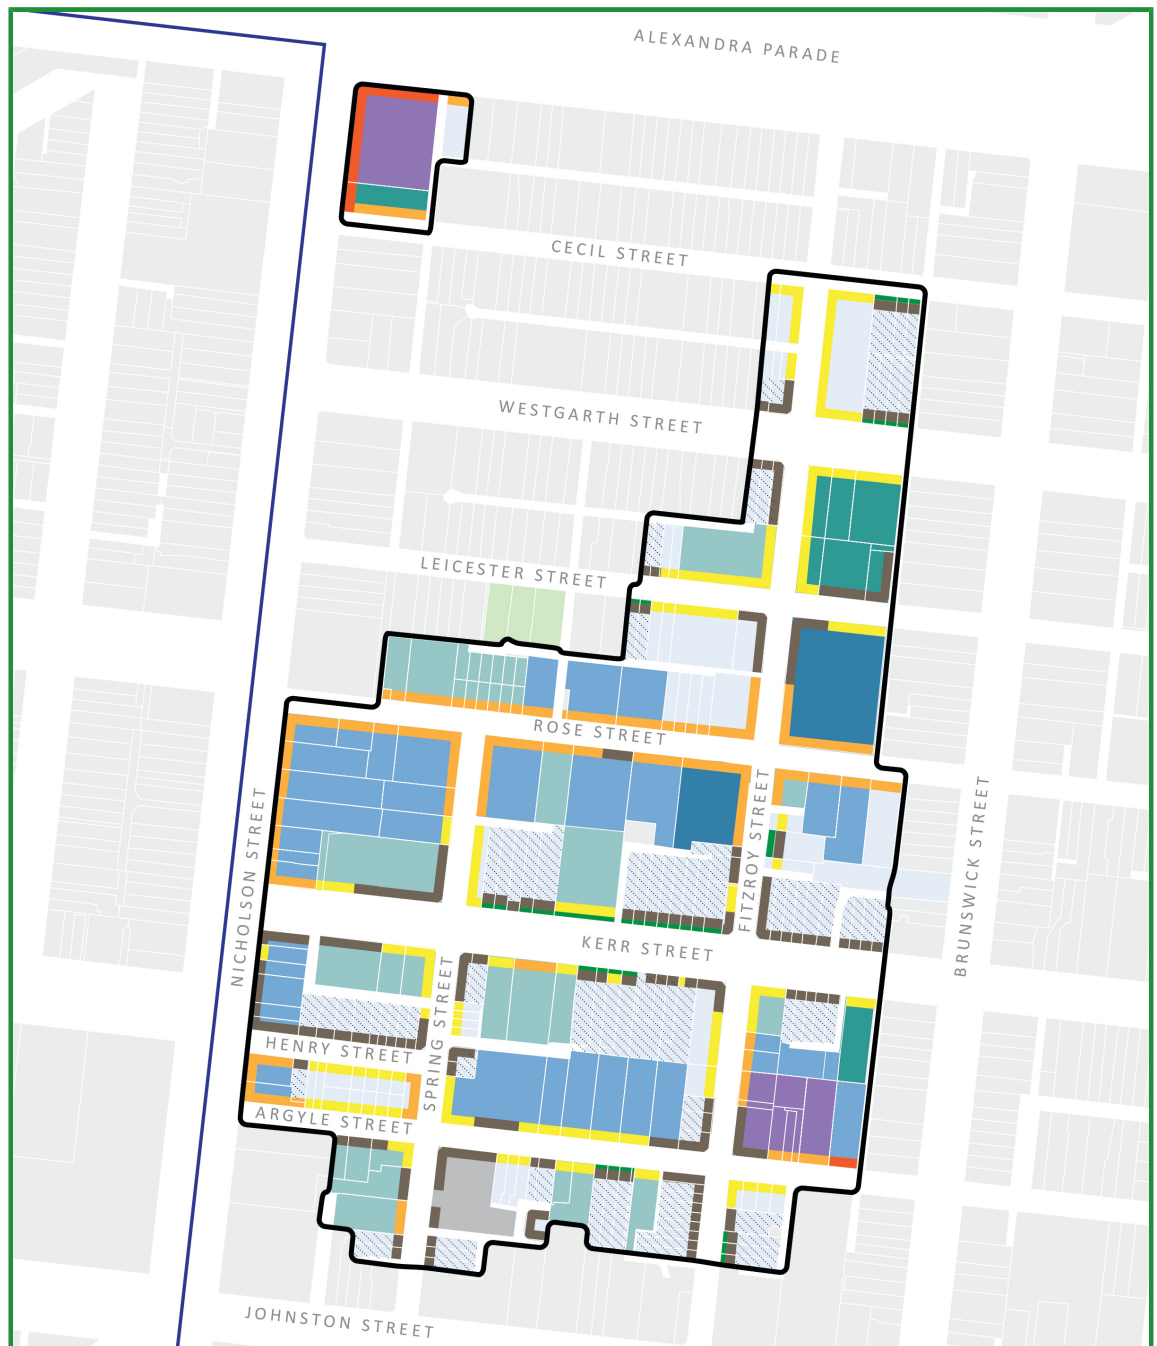

Building Heights	Building Heights	Preferred Streetwall
Victorian Terraces as marked by the dotted diagonal lines have a 11m/ 3 storey building height	11.2m/ 3 storeys	Retain heritage streetwall
	12m/ 3 storeys*	Retain landscape setback
	14.4m/ 4 storeys	New 2 storey streetwall (8m)
	17.6m/ 5 storeys	New 3 storey streetwall (11.2m)
	20m / 5 storeys*	New 3 storey streetwall (12m)*
	20.8m/ 6 storeys	New 4 storey streetwall (14.4m)
	24m/ 7 storeys	New 4 storey streetwall (16m)*
	28m/ 7 storeys*	
	27.2m/ 8 storeys	
	Limited opportunity	
Note: * for C2Z sites only.		

Preferred Maximum Building Heights	Preferred Maximum Streetwall Heights
3 storeys / 11.2m	New 2 storey streetwall / 8.0m
3 storeys / 12.0m*	New 3 storey streetwall / 11.2m
4 storeys / 14.4m	New 3 storey streetwall / 12.0m*
4 storeys / 16.0m*	New 4 storey streetwall / 14.4m
5 storeys / 17.6m	New 4 storey streetwall / 16.0m*
5 storeys / 20.0m*	
6 storeys / 20.8m	
6 storeys / 24.0m*	
7 storeys / 24.0m	
7 storeys / 28.0m*	
27.2m / 8 storeys	
32.0m / 8 storeys*	
Limited opportunity	
Note: * for C2Z sites only	
	Heritage Streetwall Heights
	Retain heritage streetwall
	Landscape Setbacks
	Retain landscape setback
Mandatory Maximum Streetwall Heights	
Properties as marked by the dotted diagonal lines have a 11.2m / 3 storey building height	

Interface ~~Requirements~~ requirements

Development on a rear boundary should not exceed the maximum heights in Table 1 (except where the rear boundary wall height is shown on Map 1).

Table 1: Rear boundary wall heights

Adjoining Zone	Maximum rear boundary wall height
NRZ	8m --- Whether or not separated by a laneway
GRZ	11.2m --- Where there is an existing laneway 8m - Where there is no laneway
MUZ / C1Z +G2Z	11.2m --- Whether or not separated by a laneway

Upper levels above a rear boundary wall ~~should~~ must be set back from the rear boundary and be contained within a 45 degree setback envelope, ~~except for green infrastructure to support soft landscaping~~. The envelope's angle is to be measured perpendicular to the adjoining residential site's boundary, (including where separated by a laneway) taken from the centre of the ~~development site's~~ boundary. This does not apply to a Commercial 1 Zone and/or Mixed Use Zone interface.

Upper level setbacks above a rear boundary wall should be contained within a maximum of two steps (including the setback above the boundary wall below as one step) to avoid repetitive stepping of individual levels.

Development should respond to existing secluded private open spaces by setting back at upper levels to create a sense of separation, minimise overshadowing and reduce building bulk.

Development should not visually dominate adjoining residential sites, including where separated by a laneway.


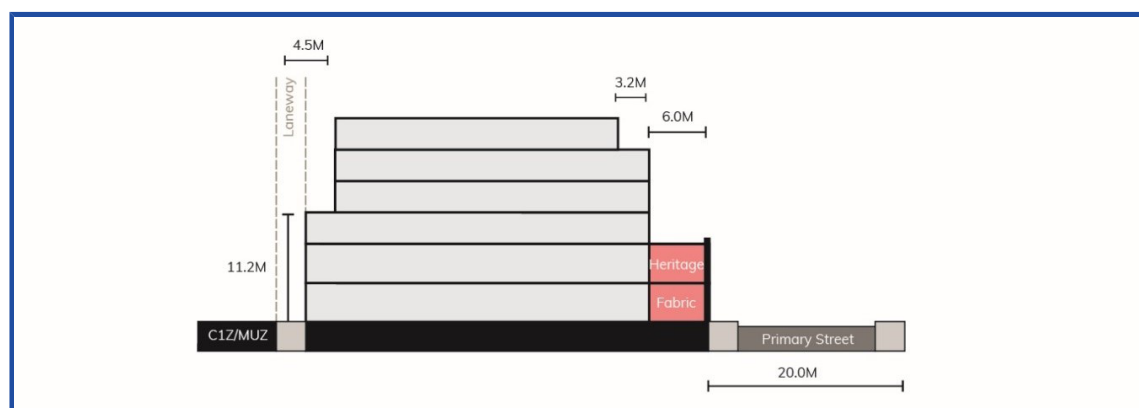
Figure 1: Indicative ~~Cross Sections and Measurements~~ cross sections and measurements

Figure 2: Indicative cross sections and measurements

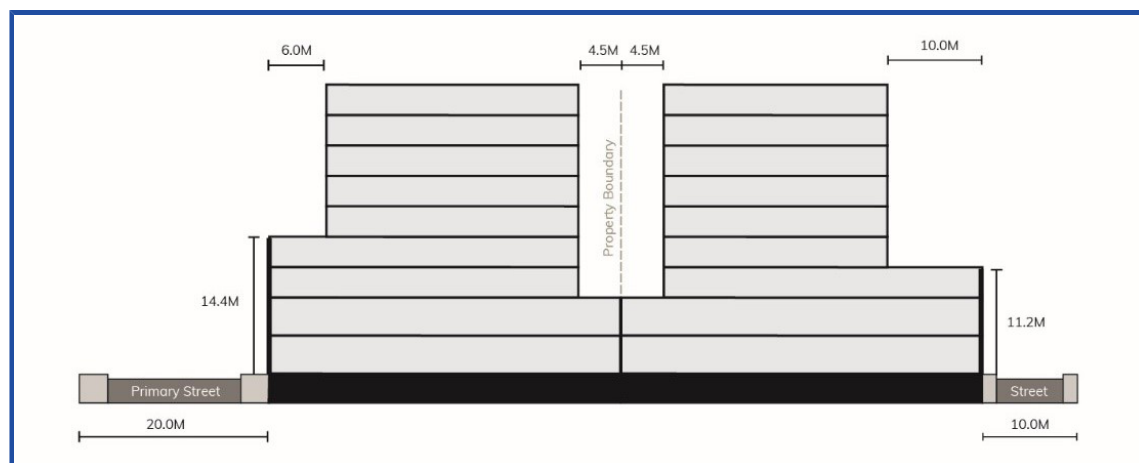

2.7 Overshadowing and solar access requirements

Development should meet the objective of Clause 55.04-5 Overshadowing for adjoining land within the Mixed Use Zone, including where separated by a laneway.

New development ~~should~~ must not overshadow:

- the opposite footpath of Cecil Street (~~3m~~ 3 metres from property frontage, including the street) between 10am and 2pm ~~at~~ on 22 September; ~~...~~
- the southern footpath of Westgarth Street and Kerr Street (~~3m~~ 3 metres from property boundary, including the street) at 10am on 22 September; ~~and~~ ...
- any opposite kerb outstands, seating and/or planting areas (as applicable), between 10am and 2pm ~~at~~ on 22 September.

Development must not increase the amount of overshadowing as caused by existing conditions, measured between 10am and 2pm on 22 September for public open spaces, reserves or parklets.

New development on all other streets should not overshadow opposite buildings from the first floor upwards between 10am and 2pm on 22 September.

2.8 ~~Common Boundary and Building Separation Requirements~~ Building separation and amenity requirements

An application for development should provide a design response that considers adjacent properties in terms of outlook, daylight and solar access to windows, as well as managing visual bulk.

Where development shares a common boundary within the overlay and/or adjoins a Commercial 1 Zone, ~~Commercial 2 Zone~~ and/or Mixed Use Zone outside of the overlay, upper level development should:

- for buildings up to 27 metres, be set back a minimum of ~~4.5m~~ 4.5 metres from the common ~~side~~ boundary, where a habitable window or balcony facing the common boundary is proposed on the subject site and/or exists on the adjacent property; and adjoining property.
- for buildings up to 27 metres, be set back a minimum of ~~3.0m~~ 3.0 metres from the common ~~side~~ boundary where a commercial or non-habitable window facing the common boundary is proposed on the subject site and/or exists on the adjacent property (including the Commercial 2 Zone) adjoining property.
- where buildings exceed 27 metres in height, the development above 27 metres be set back a minimum of 6 metres from the common boundary, whether or not windows are proposed on the subject site.

Where the common boundary is a laneway, the setback is measured from the centre of the laneway.

Where development consists of multiple buildings and/or separate upper levels, upper level development should:

- be set back a minimum of ~~9m~~ 9 metres from each other, where a habitable window or balcony is proposed; ~~and~~ ...
- be set back a minimum of ~~6m~~ 6 metres from each other where a commercial or non-habitable window is proposed.

2.9 ~~Building Layout Requirements~~ Other design requirements

~~Internal layout of commercial and residential units should show how they can be adapted over time, including demonstrating how commercial and residential units can be combined or divided without major structural remedial works.~~

Ensure shop front widths are not reduced to the extent they become commercially unviable.

~~Buildings in the Commercial 1 and/or Mixed Use Zone should:~~

- ~~■ be designed to accommodate commercial activity at the ground floor level; and~~
- ~~■ incorporate floor to floor heights suitable for commercial activity of at least 4 metres at ground floor level, where heritage elements are not a constraint.~~

Development should provide for green infrastructure to support soft landscaping and vertical greening (such as canopy trees where possible, green walls or planter boxes) to reduce the impact of urban heat island and provide a positive contribution to the public realm.

2.10

Façade Design Requirements

Development should achieve active frontage design at ground level to create a pedestrian-oriented environment and passive surveillance towards the public realm.

Development ~~façades should~~ should achieve good urban design outcomes and architectural excellence by including, but not being limited to:

- façades which relate to the vertical and horizontal proportions of either:
 - the mixed historic industrial warehouse and/or residential character of Fitzroy West, as applicable; or
 - the existing, varied commercial character for the Commercial 2 Zone land fronting Nicholson Street and at the western junction of Alexandra Parade, as appropriate.
- ~~create a suitable~~ creating an appropriate ratio of solid and void elements;
- ~~create~~ creating visual interest through the arrangement of fenestration, balconies and the application of architectural features ~~such as~~ including external shading devices, window sills, etc.;
- ~~avoid~~ maintaining an appropriate level of design simplicity by avoiding overly busy façades that rely on a multitude of materials and colours;
- ~~maintain~~ maintaining existing openings and the inter-floor height of a heritage building and ~~avoid~~ avoiding new floor plates and walls cutting through historic openings;
- ~~avoid~~ avoiding highly reflective glazing in openings of heritage buildings;
- ~~encourage~~ encouraging the retention of solid built form behind retained heritage façades and ~~avoid~~ avoiding balconies behind existing openings; so as to avoid facadism.
- ~~be simple and~~ ensuring the building design does not compete with the more elaborate detailing of the heritage building(s) on the subject site or ~~an adjoining site;~~ adjoining land.
- ~~avoid~~ avoiding large expanses of glazing with a horizontal emphasis, except to ground floor shopfronts ~~and former industrial buildings; and~~...
- ~~ensure~~ minimising projections such as balconies, building services, architectural features (other than shading devices, mouldings etc.) ~~do not~~ which intrude into a setback ~~and not~~ or visually dominate the façade.

Lower levels of development should:

~~Building services and service cabinets should be located away from the primary street frontage and should be designed and located so they complement the street frontage and character and appearance of the building.~~

- be designed to accommodate commercial activity at the ground floor, incorporating a commercial floor height of approximately 4 metres floor to floor height.

- incorporate adaptable commercial and residential floor layouts, which could be combined or divided to allow for a variety of uses over time.
- provide commercial uses with rear lane/rear street or side street access where such access is possible to ensure practicable functioning of the commercial ground floor space.
- avoid floor to ceiling glass with limited entries for large expanses of the ground floor.
- allow unobstructed views through openings into the ground floor of buildings.
- include fine grain design that engages the pedestrian and provides detail, articulation, depth, materiality and rhythm that contributes to a high-quality street interface and where appropriate integrates seating perches into street facades.
- on sites abutting narrow footpaths of less than 1.8 metres, provide for front setbacks and/or generous, recessed building entrances to provide space for pedestrian circulation and include space for landscaping, outdoor trading, seating and/or visitor bicycle parking.
- locate building service entries/access doors and cabinets away from the primary street frontage, or where not possible, they should be sensitively designed to integrate into the façade of the building and complement the street frontage and character.

The design of upper levels of development should:

- be well-designed and articulated and where appropriate utilise design techniques such as architectural rebates of sufficient depth and / or a range of parapet heights to break up the building mass across wide frontages.
- distinguish between the lower and upper levels through materials and articulation, with visually lightweight materials and colours applied above the street wall.
- incorporate green infrastructure as an integral part of the building fabric to support soft landscaping.
- be designed so that side walls are articulated and read as part of the overall building design and not detract from the streetscape when viewed from direct and oblique views along the streetscape.

New development should consider opportunities for lot consolidation to achieve high quality design and heritage outcomes.

Development should avoid blank walls visible to the public realm, including on side street frontages.

~~Blank side~~Side walls in a mid-block location which are visible permanently or temporarily from adjoining residential sites and/or the public realm should be designed to provide visual interest to passing pedestrians through colour, texture-, soft landscaping, varied materials and/or finishes.

Projections such as building services and architectural features (other than shading devices, mouldings etc.), balconies and balustrades should not protrude into a street wall and upper level setback, as applicable.

Development interfacing with areas of public open space should:

- provide a suitable transition in scale to the interface with the public open space.
- ensure that development does not visually dominate the public open space.
- provide passive surveillance from lower and upper levels of the building.

2.442.10

Access, ~~Parking and Loading Areas Requirements~~parking and loading bay requirements

Pedestrian access to buildings should be achieved via streets and avoid primary access from laneways. Where pedestrian access from a laneway is appropriate, ~~it should include~~the building setback should provide for a pedestrian refuge or landing.

Ensure pedestrian entrances are clearly visible, secure, well-lit and have an identifiable sense of address.

Residential and commercial pedestrian entrances should be distinguishable from each other.

The common pedestrian areas of new buildings should be designed with legible and convenient access, with hallway and lobby areas of a size that reflects the quantity of apartments or leasable floor area serviced and which can be naturally lit and naturally ventilated.

Resident and staff bicycle parking should be located preferably at ground floor, and designed to be secure and conveniently accessible from the street and associated uses.

Vehicle access should be achieved from laneways or side streets (in that order of preference).

At the intersection of laneways and footpaths, development to non-heritage buildings should provide a minimum 1 x 1 metre splay to ~~ensure pedestrian safety~~ facilitate pedestrian sightlines.

Car parking should be located within a basement or concealed from the public realm.

Separate entries for car parking entries and loading bays should be avoided.

Vehicle ingress and egress into development, including loading facilities and building servicing, should be designed to ~~ensure a high standard of pedestrian amenity and limit potential conflict between vehicle movements and pedestrian activity~~ retain the continuity of the public realm by:

- ensuring a high standard of pedestrian amenity.
- limiting potential conflict between vehicle movements and pedestrian activity.
- avoiding wide crossover points.
- ensuring adequate spacing between crossovers.

Development with redundant vehicle access points should reinstate the kerb, line-marked parking bays, and relocate any parking signs.

~~Development with laneway access may require~~ Where a ground level ~~set back in order~~ setback is provided to achieve practicable vehicle access. ~~Between ground level and first floor, a~~ to a laneway, a minimum headroom clearance of ~~3.5 meters minimum should be achieved~~ 3.6 metres should be provided to any overhang of the first floor.

Properties on the inside corner of bends in laneways or at intersections between two laneways should provide a minimum 3m x 3m splay to facilitate vehicle access.

3.0 Subdivision

~~22/10/2021~~ ~~6288yara~~ ~~Proposed C271yara~~ None specified.

4.0 Advertising Signs

~~22/10/2021~~ ~~6288yara~~ ~~Proposed C271yara~~ None specified.

5.0 Application requirements

~~22/10/2021~~ ~~6288yara~~ ~~Proposed C271yara~~ The following application requirements apply to an application for a permit under Clause 43.02, in addition to those specified elsewhere in the scheme and ~~must~~ should accompany an application, as appropriate, to the satisfaction of the responsible authority:

- a site analysis and urban design context report which demonstrates how the proposal achieves the Design Objectives and requirements of this schedule;
- ~~for development proposals for buildings over 20 metres in height should be accompanied by a wind study analysis~~ a desktop wind effects assessment for the proposed development to assess the impact of wind ~~on the safety and comfort of the pedestrian environment on footpaths and other public spaces while walking, sitting and standing; and;~~

- the safety and comfort of the pedestrian environment on footpaths and other public spaces while walking, sitting and standing.
- the safety and effects on cyclists travelling along bicycle routes that are adjacent to the development.
- a Traffic Engineering Report prepared by a suitably qualified traffic engineer that ~~demonstrates how the development:~~
 - demonstrates how the development minimises impacts on the level of service, safety and amenity of the arterial road network (including tram services);
 - demonstrates how the development reduces car dependence and promotes sustainable transport modes; ~~and~~
 - ~~which~~ includes an assessment of the impacts of traffic and parking in the Precinct including an assessment of the ongoing functionality of laneway/s, where applicable.

6.0

Decision guidelines

07/03/2024 - / - / - -
G323yara Proposed C271yara

The following decision guidelines apply to an application for a permit under Clause 43.02, in addition to those specified in Clause 43.02 and elsewhere in the scheme which must be considered, as appropriate, by the responsible authority:

- whether the requirements in Clauses 2.2 to ~~2.11~~ 2.10 are met;
- whether the proposal achieves adaptable and practicable floor plan layouts for various uses over time, including for service access points to the rear and sides where possible.
- whether the ~~design of the streetscape interface makes a positive contribution to an active, pedestrian-oriented street environment and/or public realm;~~ proposal provides a high-quality public realm interface that either activates the street edge or provides an engaging and well-designed street interface, and contributes positively to the pedestrian environment and other areas of the public realm.
- whether the design of development in the Fitzroy West precinct retains a mixed use heritage industrial and/or residential character;
- whether the design of development fronting Nicholson Street and Alexandra Parade achieves a fine grain commercial character;
- whether development retains the prominence of the heritage street wall in the vistas along the primary street frontage within the precinct;
- whether heritage buildings on street corners retain their prominence when viewed from the opposite side of the primary and secondary street;
- whether heritage buildings retain their three-dimensional form as viewed from the public realm, including the opposite side of the street;
- whether upper level development above the heritage street wall is visually recessive and does not ~~dominate or~~ visually overwhelm the heritage buildings;
- whether a strong sense of separation between upper levels and street walls is achieved when viewed from the opposite side of the street;
- whether the proposal responds to the presence of heritage buildings either on, or in close proximity to the site through a suitable transition in scale of street-wall, upper level setbacks and building height.
- whether the development delivers design excellence, including but not limited to building siting, scale, massing, articulation and materials;
- whether upper side and rear setbacks are sufficient to limit the impact on the amenity of existing dwellings;

- ~~the shadowing impacts of the development on opposite footpaths and public spaces are minimised;~~
- whether proposed roof decks are set back from lower levels and are recessive in appearance;
- whether the design responds to the interface with existing low-scale residential properties, including avoiding additional overshadowing of secluded private open space.
- whether proposed buildings and works will avoid overshadowing of footpaths, kerb outstands, public open spaces, reserves, parklets or similar, as applicable.
- whether the ~~development~~ proposed built form mitigates negative wind effects; created by the development.
- the ~~cumulative~~ impact of development on traffic and parking in the nearby area, including on the functionality of laneways; ~~and~~ and bicycle lanes.
- whether the layout and appearance of areas set aside for vehicular access, loading and unloading and the location of any proposed car parking is practicable, safe and supports a pedestrian-oriented design outcome.

Expiry

~~The requirements of this schedule cease to have effect after 30 June 2025.~~